





















B-Class with supply pump

Description

The IRM®-6 Watermanager B-Class is a complete system> for bottom installation with IRM® controls, integrated disconnection tank and built-in double pump system. The IRM® controls control the water levels in the disconnection tank and the large rainwater well. The controls also provide for cascade control and an operation hours schedule for the pumps. Lacking rainwater, system fault or manual operation, the system will switch back to the disconnection tank. The drinking water is supplemented into the disconnection tank through a special proportional float. This happens in a reliable manner in accordance with EN1717 and the machine as such is Belgaqua and KIWA certified.

The switch to municipal water can also take place manually. The municipal connection is fitted with stagnation protection that automatically refreshes the water in the machine every 10 days. The potential free contact makes a connection to automated and building management systems possible. Fitted with automatic filter cleaning controls.

Specifications

Width in mm	550	
Depth in mm	650	
Height in mm	850	
Weight (empty)	60 kg	
Suction pipe	2 x 1" bi	
Pressure pipe	11⁄4″	
Overflow in mm	2 x 75	
Drinking water	2 x ³ / ₄ "	
Floater cabel	20 m	
Power	1,6 kW	
Max. flow	8 m3/h	
Max. Suction lift	20 m	
Max. pressure	3,5 bar	
Voltage	230V/50Hz	
Weight (empty)	60 kg	
Materials: cover of PS, Breaktank of PE, Console of galvanized steel, pump console PP		


Price group UK		
Art. No	Description	
402601	IRM*-6 -Watermanager B-Class	
	Accessories	


ALL NO	Description	ru
402601	IRM*-6 -Watermanager B-Class	4
	Accessories	
402702	Connection set B-Class	4
402706	Supply pump for the B-Class	4
402710	level sensor for the B-Class 25 meter	4
401158	Back flow protection	2

All prices are excluding VAT and transport



Connection diagram

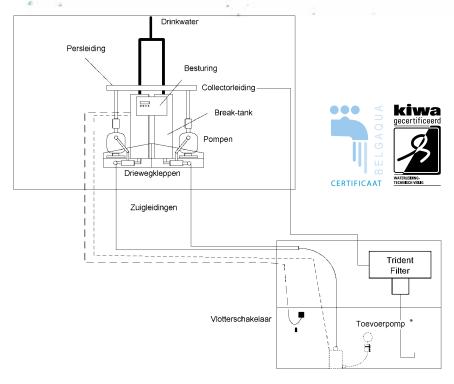





Cabels of the B-Class



Digital display B-Class

Installation

